

DATASHEET

Subrack 4U 84TE/3U Incl. 1U Cable Overlength Box



General data

19"/3U subrack with 84DU

Additional integrated 1U cable overlength box

Total height: 4U

4U aluminium side walls for installation in 19" rack

84DU depth adjustable subrack with 1DU splitting (1DU=5,08mm)

DU numbert for bettere overview

Cable overlength box to the back/front sliding unit

Front mounted cable routing panel with 5 cable brackets

Delivery unequipped

Scope of delivery: 1 x subrack mounted

1 x PG16 cable gland incl. locknut

5 x cable brackets

Dimensions: 483 x 178 x 295 mm

Allgemeine Daten

With integrated PCB-mounting connection system	False
Wall mounting possible	False
Side-by-side housing	False
Surface finishing	With powder coating

This datasheet was created automatically on 28-06-2023 . Technical changes reserved.



DATASHEET

Subrack 4U 84TE/3U Incl. 1U Cable Overlength Box

With screening	False
With ventilation slots	True
Type of enclosure	Open
Degree of protection (IP)	IP20
Rail mounting possible	False
Material	Thermoplastic

Abmessungen

Depth	295 mm
Width	483 mm
Height	177.8 mm

Umgebungsbedingungen

Operating Temperature	
-----------------------	--

Available variants

ArtNr.	Bezeichnung	max. Modules	Farbe	RAL-Nummer	Rastermaß (TE)
53711.1	Subrack 4U 84TE/3U Incl. 1U Cable Overlength Box	12	Aluminium	-	84 TE


Drawings

This datasheet was created automatically on 28-06-2023 . Technical changes reserved.



DATASHEET

Subrack 4U 84TE/3U Incl. 1U Cable Overlength Box

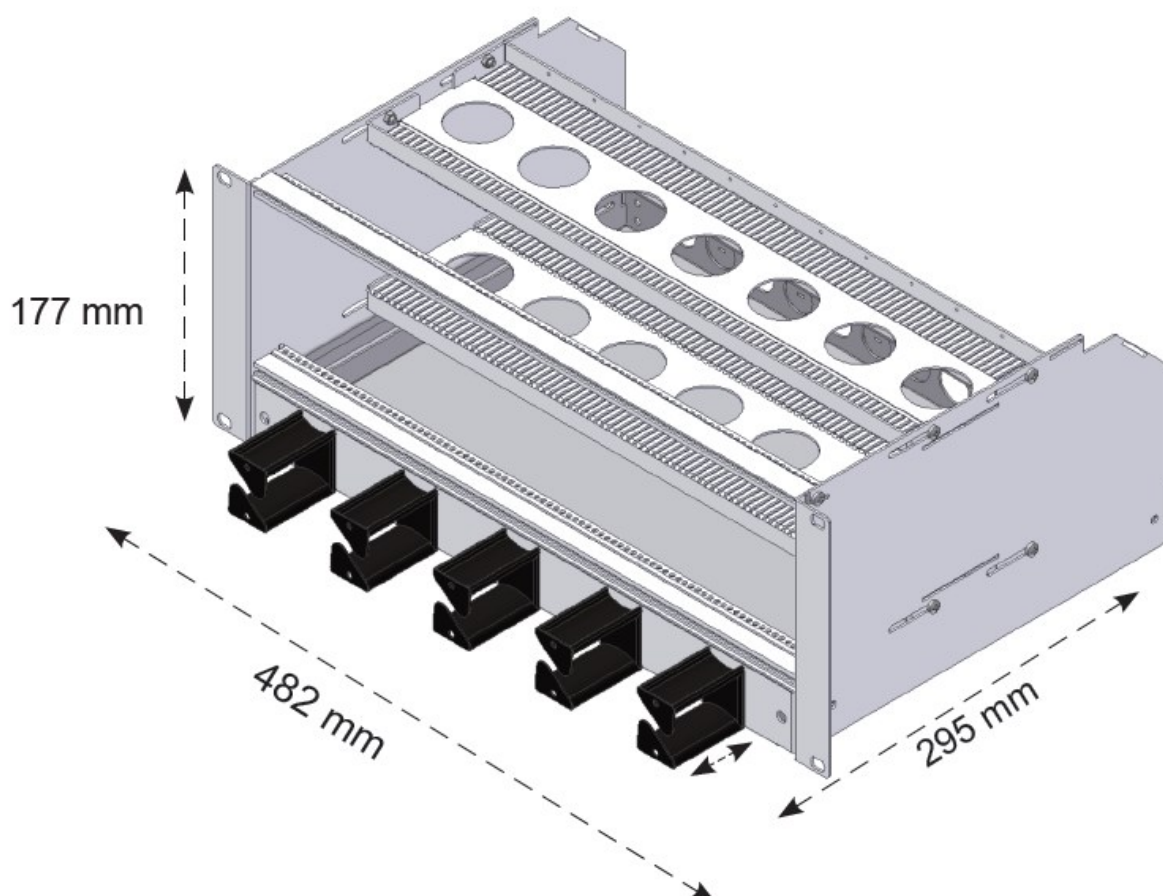

This datasheet was created automatically on 28-06-2023 . Technical changes reserved.