

Digitus® USB 2.0 to RJ45 console adapter cable, FTDI chipset, 180 cm

DA-70173

EAN 4016032506003



USB to RJ45 Console Cable 1.8m FT232RNLchipset, light blue, switch, router

The DIGITUS® USB 2.0 to RJ45 console cable with integrated FTDI chipset enables direct access to the console interfaces of network devices such as routers, switches, firewalls and WLAN controllers - without the need for an additional serial adapter. Ideal for IT professionals and system integrators, this cable provides fast and reliable terminal access from modern laptops and desktop PCs via USB. Thanks to plug-and-play and support for all common operating systems, this console cable is an indispensable tool for configuring devices from leading manufacturers such as Cisco, Ubiquiti, Juniper, MikroTik, Fortigate, TP-Link, Huawei and many others. A nickel-plated USB-A plug and a 180 cm long cable ensure high durability and flexibility in any environment.

Compatible with almost all major manufacturers and operating systems, powered by the FTDI chipset.

- USB 2.0 to RJ45 console adapter
- Chipset: FTDI FT232RNL

- Interface: Full duplex
- Baud rate: 75 to 128,000 bps
- Downwards compatible with USB 1.1
- Gold-plated contacts
- Connections: 1x USB-A plug to 1x RJ45 plug
- Cable length: approx. 180 cm
- Compatible operating systems: Windows 11 / 10 / 8.1 / 8 / 7 / Vista / XP, macOS X, Linux, ChromeOS
- Driver installation required for Windows 7+, macOS 10.15+, Linux
- COM port retention function
- Ideal for accessing the CLI (Command Line Interface) of network devices such as Cisco, Ubiquiti, Juniper, MikroTik, TP-Link, Huawei, Fortigate, HP ProCurve etc.


Package contents

- USB 2.0 to RJ45 console adapter cable (FTDI FT232RNL chipset)
- User manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	8.80	46.00	23.50	37.00	39,997.00
Packaging Unit Inside	1	0.11	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.11	3.50	11.00	11.00	423.50
Net single without Packaging	1	0.07	2.00	10.00	10.00	0.00

More images:

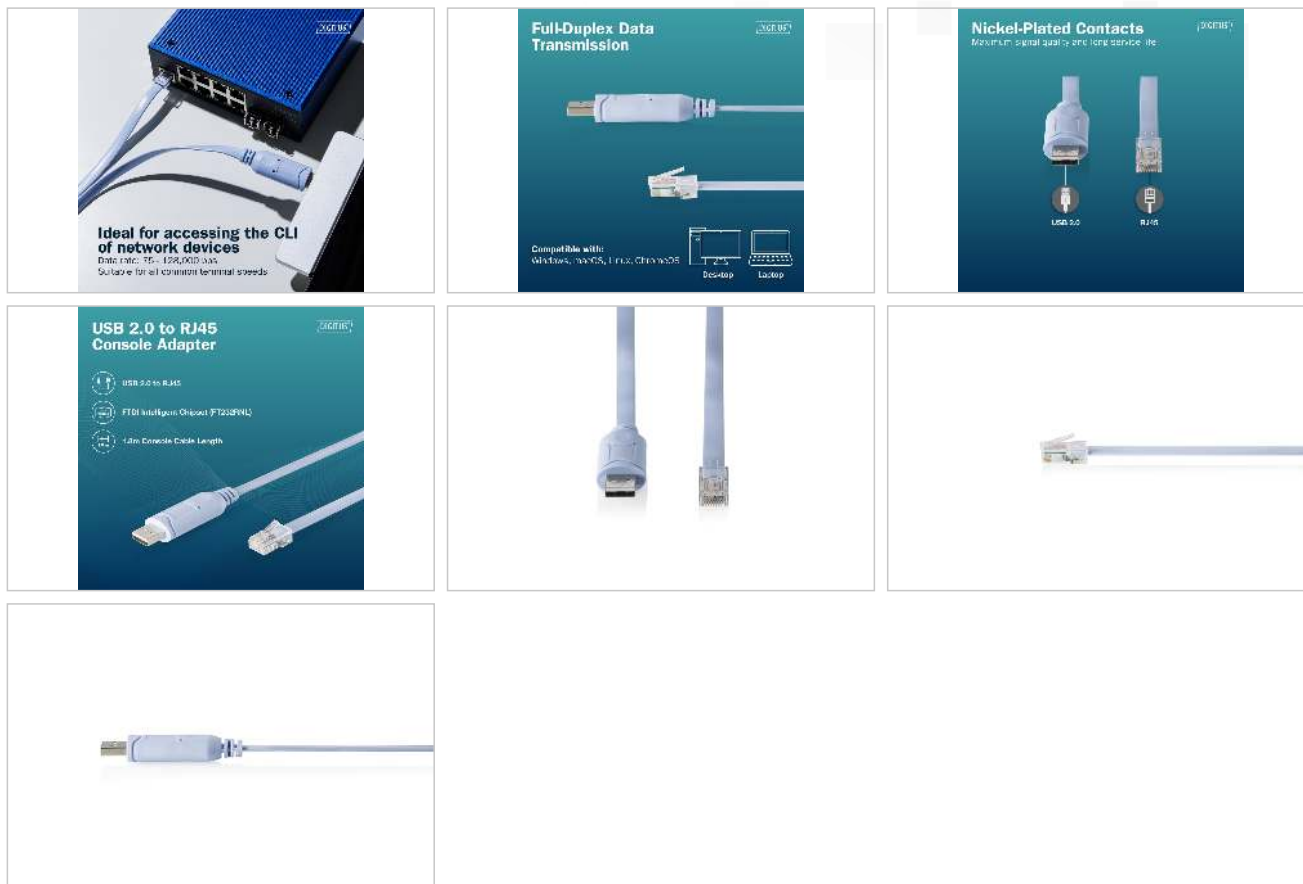

Safety notes

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com