

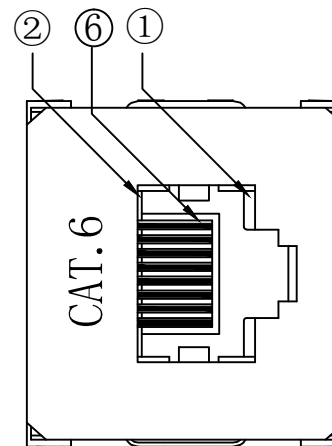
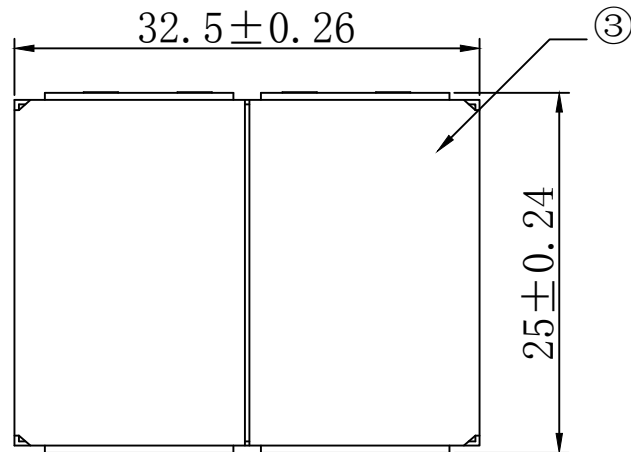


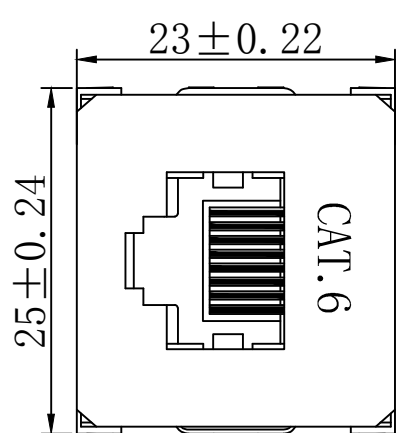

Technical requirement:

1. The product should be followed with Cat 6 connection and technical standard;
2. Unmarked tolerance dimension on the basis of SJ/T10628 - 1995 6 grade;
3. ROHS2.0 ADN REACH COMPLIANT
4. Operation temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Operation humidity:30%~80%
Storage humidity:30%~80%
5. PACKING: 1PCS/Renkforce color box(SIZE:105 x 20 x 140mm)

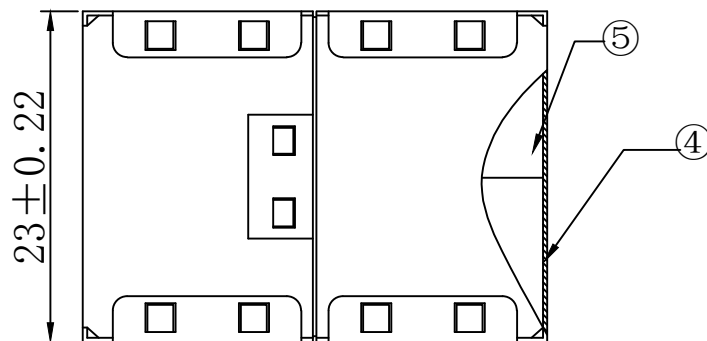

Connection Method

- ① ————— ①
② ————— ②
③ ————— ③
④ ————— ④
⑤ ————— ⑤
⑥ ————— ⑥
⑦ ————— ⑦
⑧ ————— ⑧
SHELL ————— SHELL

MATERIAL LIST:

⑥	Contact	8P8C 3U" Gold Plated	8	
⑤	Base	ABS	1	
④	roof cover	ABS	1	
③	shielded enclosure	Nickel Plated brass t=0.3mm	2	
②	PCB	FR-4, t=0.8	1	
①	PCB outlet	PBT	2	
NO	MAT. NAME	DESCRIPTION	QT' Y	REMARK

						PRODUCT NAME	CAT.6 STP Coupler	ITEM NO.	1404063		
								UNO ITEM NO.	276200	UNIT	MM
			NEW		2015. 12. 21		DRAWNBY	CHECKBY	APPOBY		DATE
BY	CHK		REVISION RECORD MODIFICATIONS		DATE	REV.	FERGUS				2015. 12. 21