




Delock PCI Express x4 Card to 1 x M.2 Key B + 1 x NVMe M.2 Key M - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. One M.2 SATA module can be connected in format 22110, 2280, 2260, 2242, 2230 with this card and connected via SATA cable to the motherboard. Additionally, one M.2 PCIe module in format 22110, 2280, 2260, 2242, 2230 can be connected. Both slots can be used at the same time.

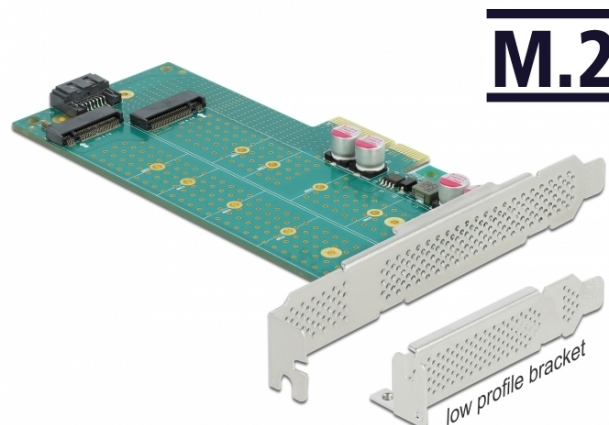

Specification

- Connectors:
internal:
 - 1 x 67 pin M.2 key B slot
 - 1 x 67 pin M.2 key M slot
 - 1 x PCI Express x4, V4.0
 - 1 x SATA 6 Gb/s 7 pin plug
- Interface: SATA / PCIe
- Supports one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 2 x LED indicator
- Bootable
- Supports NVM Express (NVMe)
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

System requirements

- Linux Kernel 4.6.4 or above
- Windows Server 2016
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Mounting material
- User manual

Item no. 89047





EAN: 4043619890477

Country of origin: China

Package: • White Box



Images



**General**

Function:	NVM Express (NVMe) bootable
Supported operating system:	Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Windows Server 2016 Linux Kernel 4.6.4 or above
LED indicator:	2 x
Slot:	PCIe SATA
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	1 x 67 pin M.2 key B slot 1 x 67 pin M.2 key M slot 1 x SATA 6 Gb/s 7 pin plug 1 x PCI Express x4, V4.0
-----------	--

Physical characteristics

Slot bracket:	low profile standard
---------------	-------------------------