


# Delock PCI Express x4 Card to 1 x M.2 Key B + 1 x NVMe M.2 Key M - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by two M.2 slots. One M.2 SATA module can be connected in format 22110, 2280, 2260, 2242, 2230 with this card and connected via SATA cable to the motherboard. Additionally, one M.2 PCIe module in format 22110, 2280, 2260, 2242, 2230 can be connected. Both slots can be used at the same time.

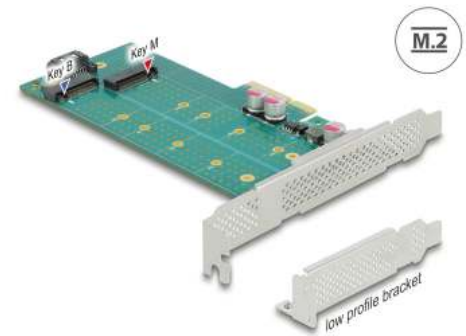

**Item no. 89047**

EAN: 4043619890477

Country of origin: China

Package: White Box

## Technical details

- Connectors:  
internal:  
1 x 67 pin M.2 key B slot  
1 x 67 pin M.2 key M slot  
1 x PCI Express x4, V4.0  
1 x SATA 6 Gb/s 7 pin plug
- Interface: SATA / PCIe
- Supports one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 2 x LED indicator
- Bootable
- Supports NVM Express (NVMe)
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

---


## System requirements

- Linux Kernel 4.6.4 or above
  - Windows Server 2016
  - Windows 8.1/8.1-64/10/10-64
  - PC with one free PCI Express x4 / x8 / x16 / x32 slot
- 

## Package content

- PCI Express card
  - Low profile bracket
  - Mounting material
  - User manual
- 

## Images

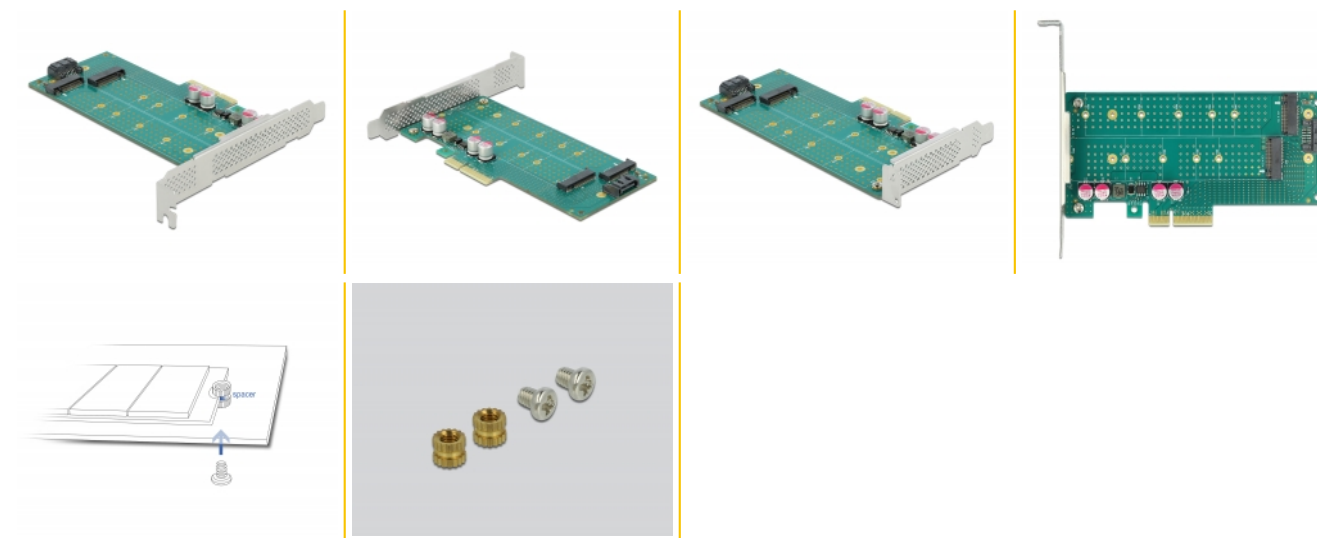

## General

|                                                 |                                                                                                                                                                                          |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function:                                       | NVM Express (NVMe)<br>bootable                                                                                                                                                           |
| Supported operating system:                     | Linux Kernel 4.6.4 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit<br>Windows Server 2016                                                 |
| LED indicator:                                  | 2 x                                                                                                                                                                                      |
| Slot:                                           | PCIe<br>SATA                                                                                                                                                                             |
| Supported module:                               | M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA<br>M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported                                                                                                                           |

## Interface

|           |                                                                                                                  |
|-----------|------------------------------------------------------------------------------------------------------------------|
| Internal: | 1 x 67 pin M.2 key B slot<br>1 x 67 pin M.2 key M slot<br>1 x SATA 6 Gb/s 7 pin plug<br>1 x PCI Express x4, V4.0 |
|-----------|------------------------------------------------------------------------------------------------------------------|

## Physical characteristics

|               |                         |
|---------------|-------------------------|
| Slot bracket: | Low Profile<br>standard |
|---------------|-------------------------|