

# Delock Riser Card PCI Express x1 to 1 x PCI 32 Bit Slot with 60 cm cable

## Description

The PCI Express riser card by Delock enables the connection of one **PCI card** via one PCI Express interface. The flexible cable allows a space-saving installation inside the computer case.

## Note

The package content includes a USB 3.0 riser cable with a length of 60 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.



**Item no. 90065**

EAN: 4043619900657

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - Motherboard side:
    - 1 x PCI Express x1
    - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
  - Riser side:
    - 1 x 32-Bit PCI
    - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
    - 1 x SATA power connector
- Chipset: Asmedia ASM1083
- Bootable
- 1 x jumper for 5 V or 3.3 V setting
- 4 x mounting holes on the riser card
- Cable data:
  - 1 x riser cable USB 3.0 Type-A male to male ca. 60 cm (incl. connectors)

## System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- PC with one free PCI Express slot


---

## Package content

- PCIe to USB riser card
- USB to PCI riser card
- USB cable
- User manual

---

## Images

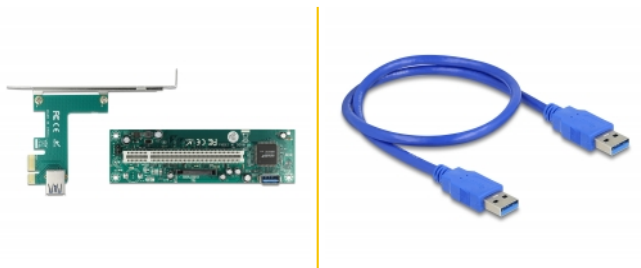

## General

|                             |                                                                                                                                        |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Function:                   | bootable                                                                                                                               |
| Supported operating system: | Linux Kernel 5.4 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit<br>Windows Server 2019 |

## Interface

|              |                                 |
|--------------|---------------------------------|
| Connector 1: | 1 x PCI Express x1              |
| Connector 2: | 1 x 32-Bit PCI                  |
| connector 3: | 1 x SATA 15 pin power connector |

## Technical characteristics

|          |                 |
|----------|-----------------|
| Chipset: | Asmedia ASM1083 |
|----------|-----------------|