thermaltake

© 2021 Thermaltake Technology Co., Ltd. All Rights Reserved. 2020.11
All other registered trademarks belong to their respective companies. *www.thermaltake.com*

Tested To Comply With FCC Standards FOR HOME OR OFFICE USE

RoHS COMPLIANT

thermaltake

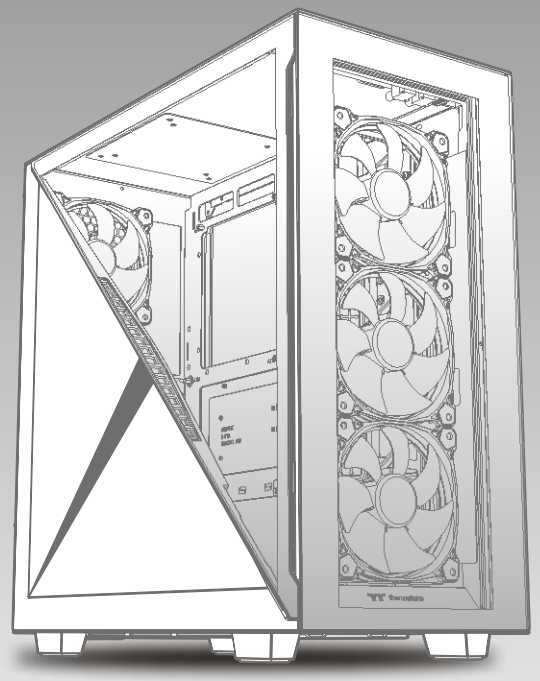

Picture is for reference only

Divider 300 TG
Divider 300 TG ARGB

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช้

TT Premium

TT Premium
To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed “TT Premium” with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake’s desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. http://ttpremium.com

Tt LCS-Liquid Cooling Support Certification

Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits

Dear Valued Customer,
Thank you for choosing Thermaltake.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.

Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
http://www.thermaltake.com/

Taiwan Facebook
http://www.facebook.com/ThermaltakeTW

Global Facebook
https://www.facebook.com/ThermaltakeInc

Global community forums
http://community.thermaltake.com

CONTENTS

Chapter 1. Product Introduction

1.0 Specification *01*
1.1 Accessory *02*
1.2 Warning and Notice *03*

Chapter 2. Installation Guide

2.0 Remove Components *06*
2.1 Power Supply Unit (PSU) Installation *07*
2.2 Motherboard Installation *08*
2.3 3.5" & 2.5" HDD Installation *09*
2.4 PCI Card Installation *11*
2.5 Air Cooling Installation *12*
2.6 AIO Liquid Cooling Installation *13*
2.7 I/O Connection *14*
2.8 Remove Filter *15*
2.9 ARGB Control Instruction *16*

Model	Divider 300 TG	Divider 300 TG ARGB
Case Type	Mid Tower	
Dimension (H*W*D)	475 x 220 x 461 mm (18.7 x 8.7 x 18.1 inch)	
Side Panel	Tempered Glass x 2	
Material	SPCC	
Cooling System	**Rear (exhaust) :** 120 x 120 x 25 mm Turbo fan (1000rpm, 16 dBA) x 1	**Front (intake) :** 120 x 120 x 25 mm ARGB fan (1000rpm, 27.2 dBA) x 3 **Rear (exhaust) :** 120 x 120 x 25 mm Turbo fan (1000rpm, 16 dBA) x 1
Drive Bays	2 x 3.5”, 5 x 2.5” or 7 x 2.5”	
Expansion Slots	7 (Rotatable Patented Design)	
Motherboards	6.7” x 6.7” (Mini ITX), 9.6” x 9.6” (Micro ATX), 12” x 9.6” (ATX)	
I/O Port	USB 3.2 (Gen 2) Type C x 1, USB 3.0 x 2, HD Audio x 1	
PSU	Standard PS2 PSU (optional)	
Fan Support	**Front:** 3 x 120 mm, 2 x 120 mm, 1 x 120 mm 2 x 140mm, 1 x 140mm **Top:** 1 x 120 mm, 1 x 140 mm **Right (M/B Side):** 2 x 120 mm, 1 x 120 mm **Rear:** 1 x 120 mm	
Radiator Support	**Front:** 1 x 360mm, 1 x 240mm, 1 x 120mm 1 x 280mm, 1 x 140mm **Right (M/B Side):** 1 x 240mm, 1 x 120 mm **Rear:** 1 x 120mm	
Clearance	CPU cooler height limitation: 145 mm VGA length limitation: 360 mm (With radiator) 390 mm (Without radiator) PSU length limitation: 180 mm (With HDD Cage) 220mm(Without HDD Cage)	

Figure	Part Name	Q`ty	Use For
	Rubber Ø10 x 4 mm	2	For PSU
	Screw #6-32 x 6 mm	4	For PSU
	Screw M3 x 5 mm	40	For Motherboard / 2.5” HDD / SSD
	Stand-off #6-32 x 6.5 mm	3	Spares
	Net setter	1	For Motherboard Stand-off
	Buzzer	1	Motherboard Alarm
	Screw #6-32 x 6 mm	10	For 3.5” HDD / VGA bracket
	Screw Ø5 x 10 mm	4	For Case Fan
	Cable Ties	10	Cable Management
	VGA Bracket	1	For VGA
	Thumb Screw #6-32 x 5 mm	3	For VGA

For ARGB Version Only

Figure	Parts Name	Q’ty	Used for
	MB Signal Bridge Cable (ASUS/MSI/ASROCK/GIGABYTE)	1	LED Signal Sync

Chassis dimension

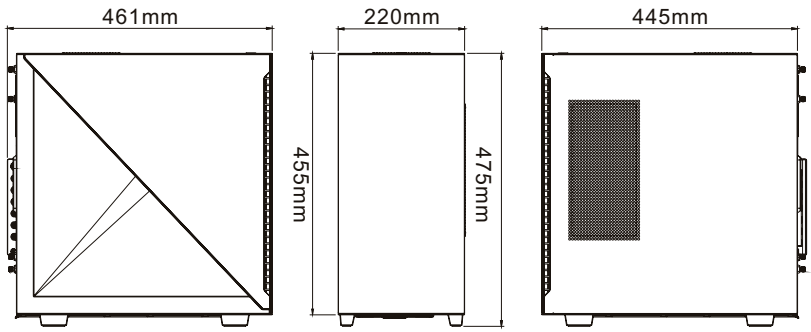

Motherboard Compatibility: ITX / mATX / ATX
(Up to 244mm wide)

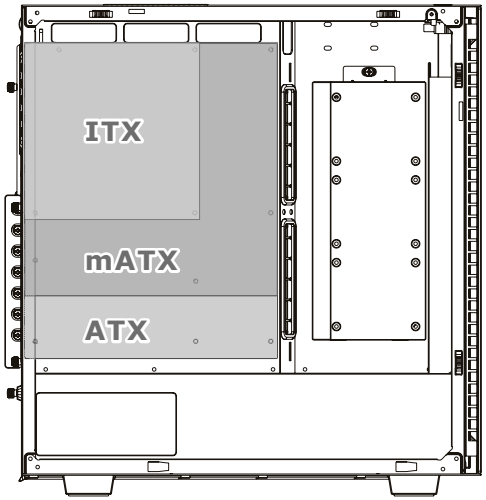

Divider 300 TG

CPU cooler max height: 145mm

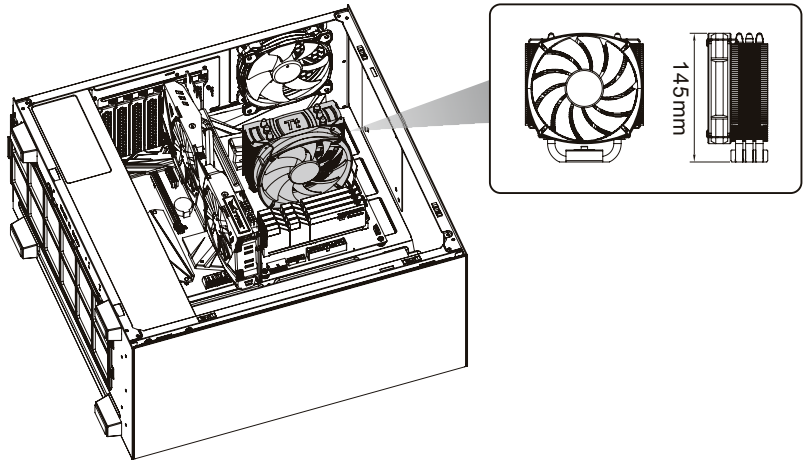

VGA length max length: 390mm

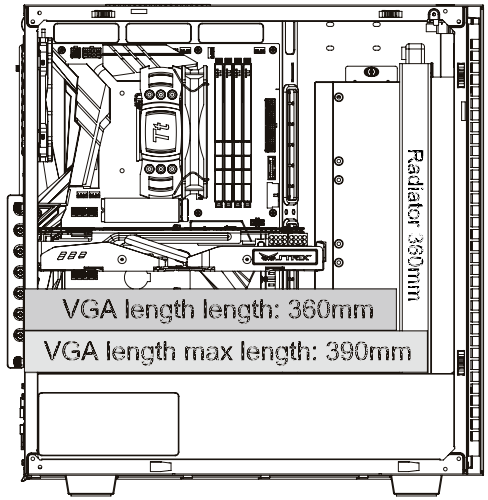

PSU max length: 180mm

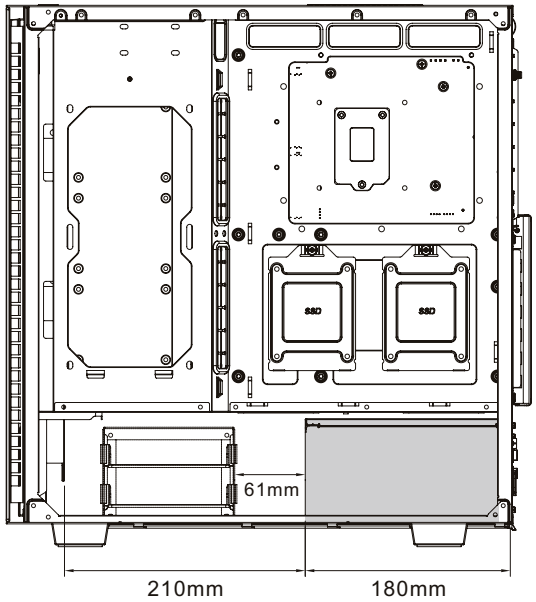

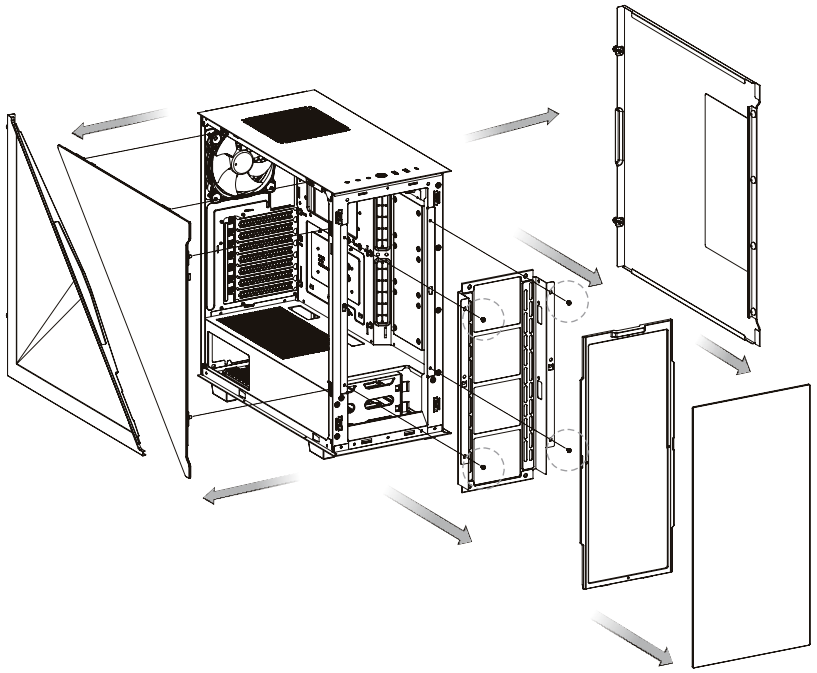


x 4

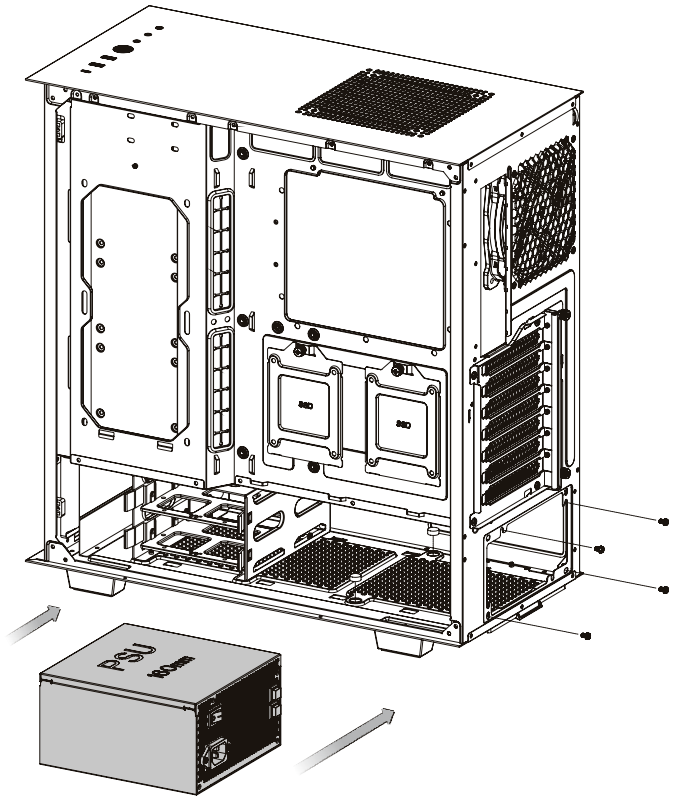
PSU


x 9

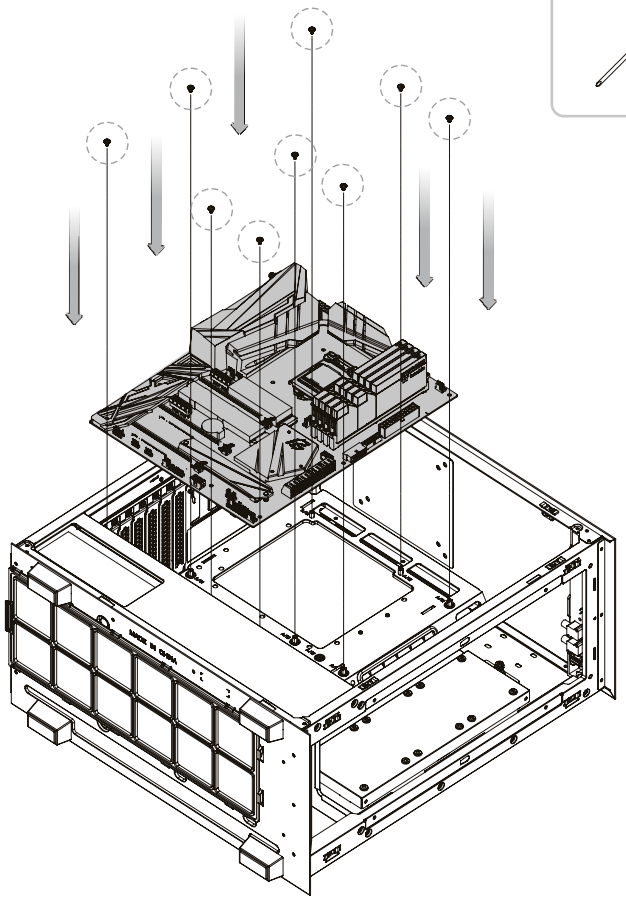


x 4

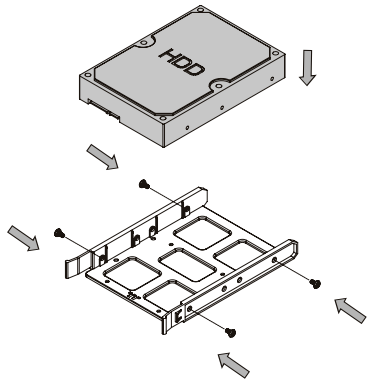
HDD

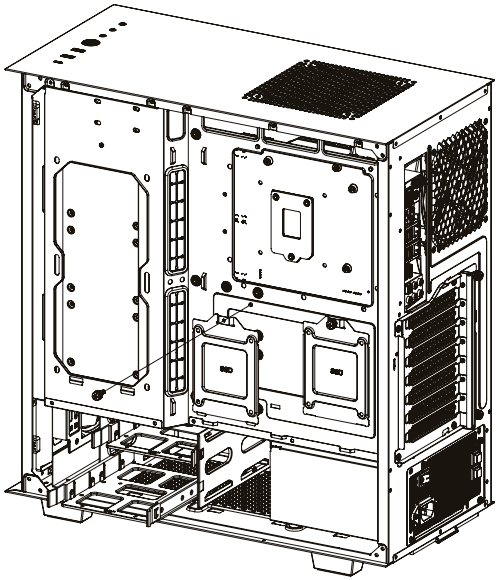


x 4

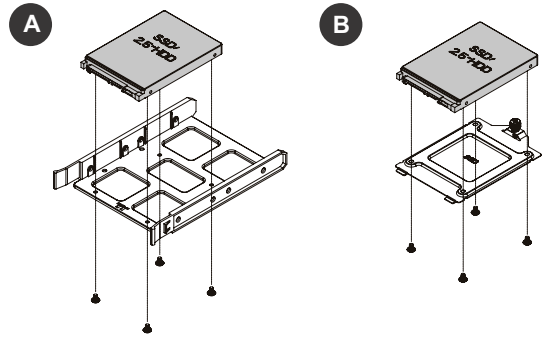
A
SSD/
2.5"HDD
B
SSD/
2.5"HDD

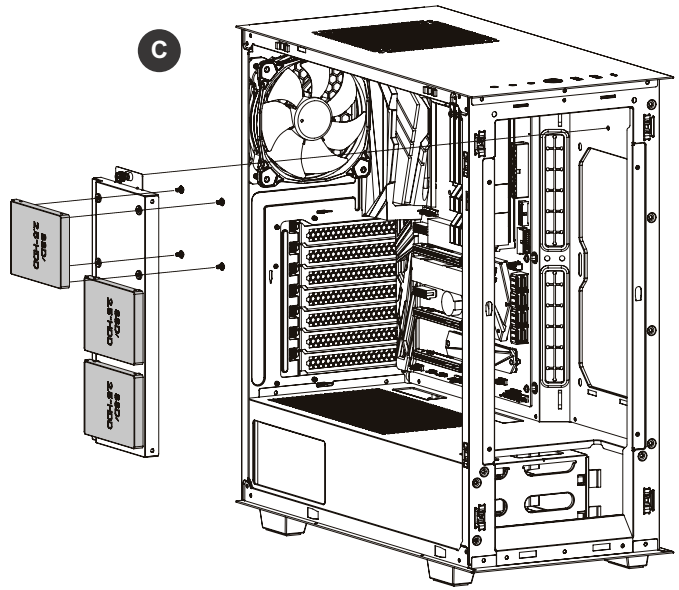
C
SSD/
2.5"HDD
SSD/
2.5"HDD
SSD/
2.5"HDD

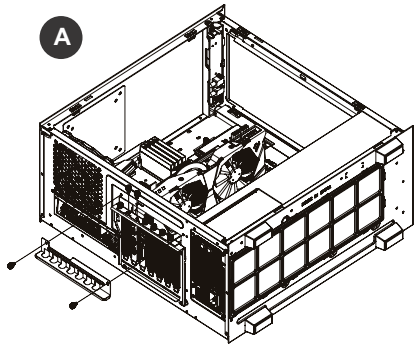

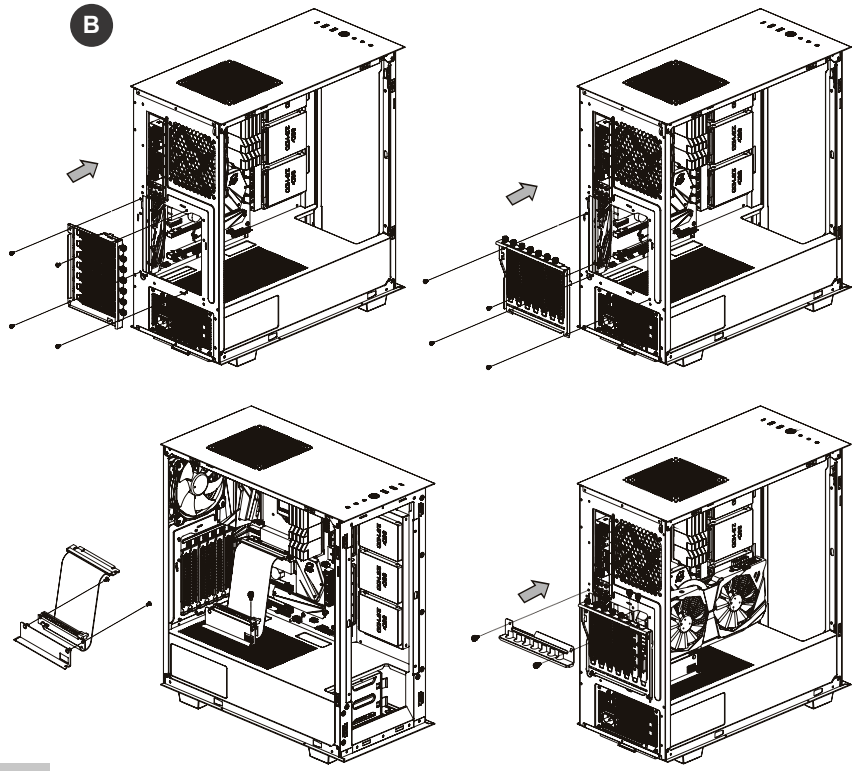



Top

120mm x 1
or
140mm x 1



Rear

120mm x 1



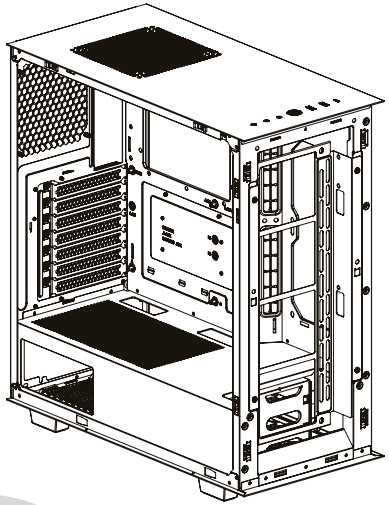

Front

120mm x 3
or
140mm x 2

M/B Side

120mm x 2

Rear

120mm x 1

Front

360mm x 1
or
280mm x 1

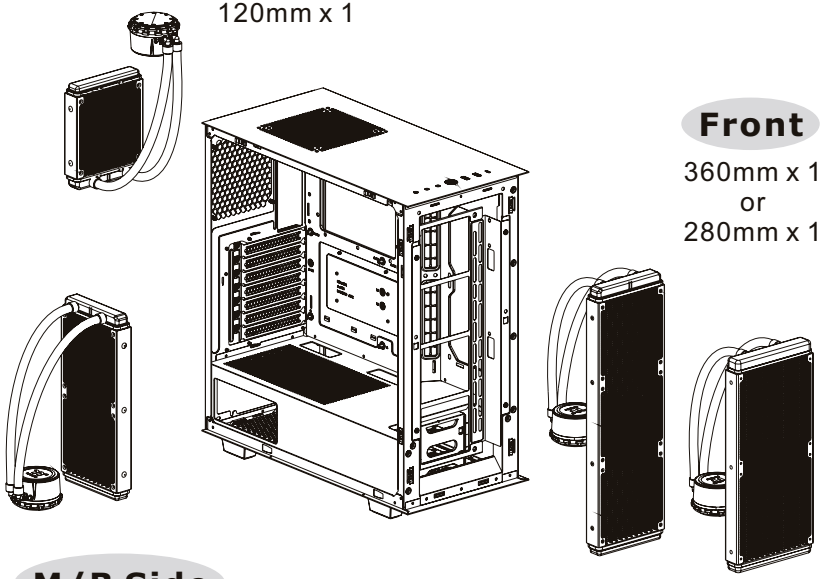

M/B Side

240mm x 1

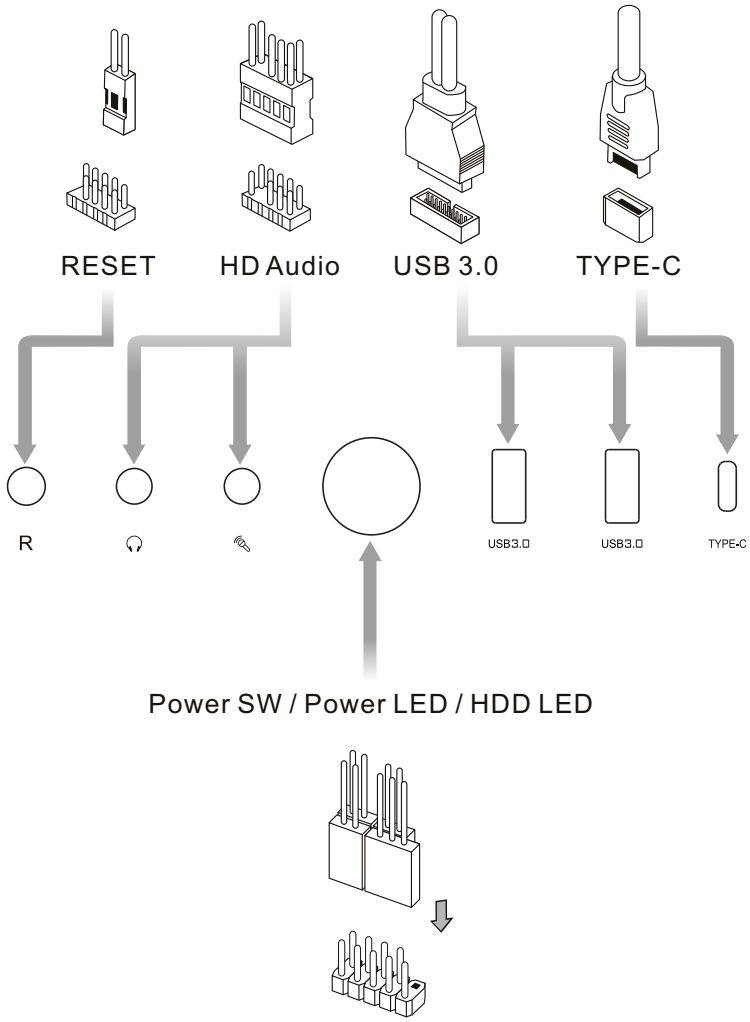

Remove Filter

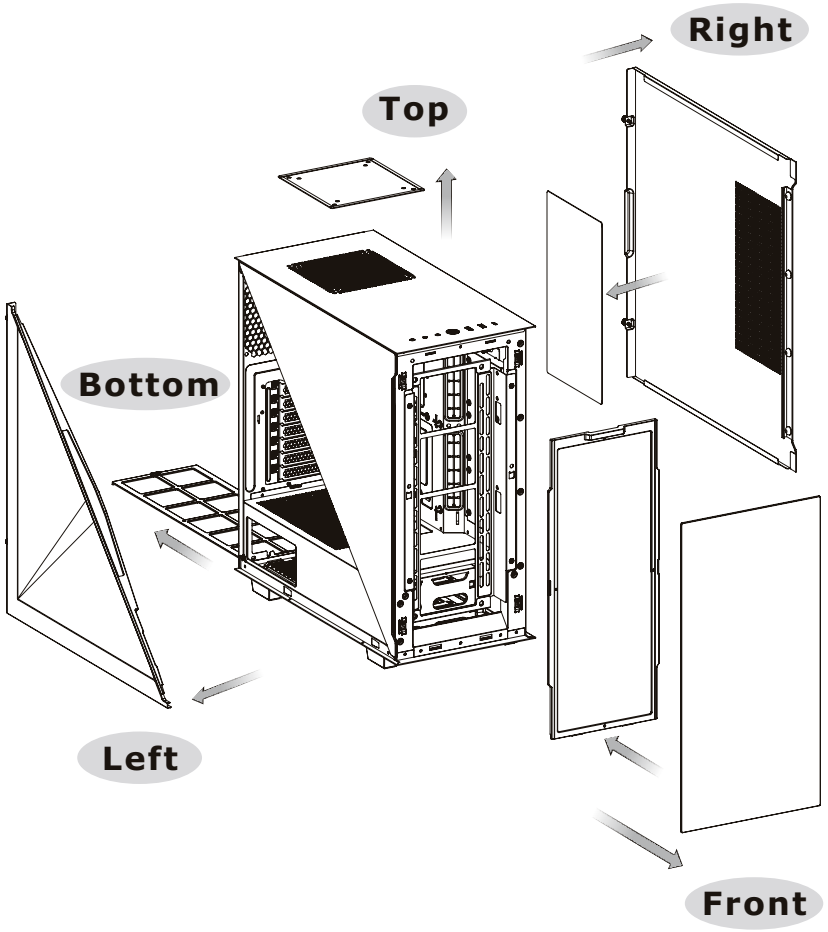

I/O Port

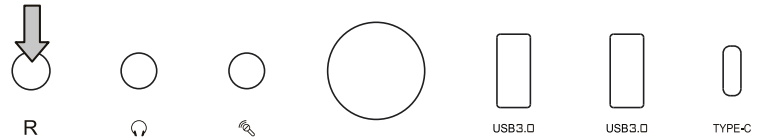

Wave Mode	Mode 1
Flow Mode	Mode 2
RGB Lighting	Mode 3 (Single Color)
Radar Mode	Mode 4~10 (Red, Yellow, Green, Cyan, Blue, White, Purple)
Breath Mode	Mode 11~18 (RGB, Red, Yellow, Green, Cyan, Blue, White, Purple)
Full Lighted Mode	Mode 19
Single Color	Mode 20~26 (Red, Yellow, Green, Cyan, Blue, White, Purple)
Light Off	Mode 27

※ Long press on RGB button for 3 seconds, fan will blink twice which now are controlled by MB software. And vice versa.
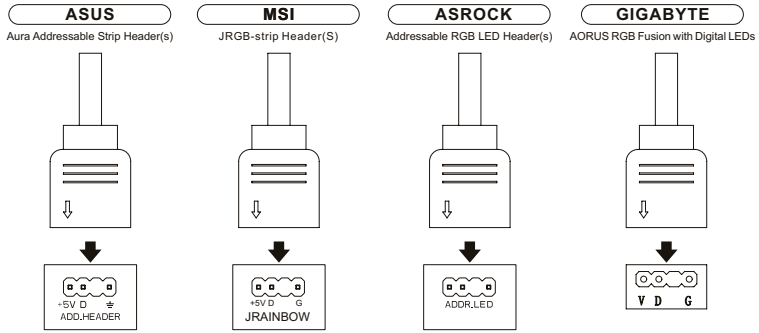
How to connect MB