



Easy Rack Power Distribution

- Easy Basic Rack PDU
- Easy Metered Rack PDU
- Easy Switched Rack PDU
- Easy Metered-by-Outlet Rack PDU with APC NMC3 Integration

NEW



www.apc.com

Life Is On

Schneider
Electric



Make Power Distribution Easy

The APC Easy Rack PDU is an easy-to-install, easy-to-use rack mount PDU that helps manage power distribution to the equipment in the rack and provides monitoring and control functionalities.

Easy Basic Rack PDU

- More than a power strip, helps in reliable power distribution

Easy Metered Rack PDU

- Real-time remote monitoring of connected loads
- User-defined alarms warn IT and data center managers of potential circuit overloads to prevent accidental power loss to critical equipment

Easy Switched Rack PDU

- Metered functionality
- Switch on/off the connected power load remotely

Easy Metered by Outlet Rack PDU

- Enhanced security protocols and functions with APC NMC3 integration
- Network Port Sharing with CAN(Controller Area Network) protocol
- Communication I/O upto 3 T/H sensor & 1 serial port
- Individual outlet level power metering
- User resettable energy (kWh) logs for capacity planning and energy efficiency initiatives

EPDU1xxxMBO ---> EPDU2xxxMBO
EPDU1xxxSMBO ---> EPDU2xxxSMBO

Easy for installation

- Ultra-lightweight, thanks to aluminum housing
- Support both toolless mounting and bracket mounting
- Built-in input cord with Industrial connector for vertical PDU
- Low-profile in-depth, more convenience for equipment installation

Easy for operation and maintenance

- User-friendly & simple web interface and LCD screen
- Support network port, easy for data communication
- Field-replaceable control module, easy for maintenance

Typical applications

- Small and medium data centers and computer rooms
- Colocation and large enterprise data centres
- Manufacturing facilities
- Telecommunication
- Commercial buildings
- Healthcare
- Transportation

Product feature by series

		NEW	NEW		
	Basic	Metered	Switched	Metered-by-Outlet	Metered-by-Outlet with switching
	EPDU1xxxB	EPDU1xxxM	EPDU1xxxS	EPDU2xxxMBO	EPDU2xxxSMBO
Design feature					
Ultralow-profile, space-saving design	√	√	√	√	√
Hydraulic-magnetic circuit breakers (in units with 32A input current)	√	√	√	√	√
Environmental monitoring port for external temperature/humidity monitoring		√	√	√	√
Availability for regional outlets socket type	√				
Display and network management					
Full-featured network management capability via Web and SNMP		√	√	√	√
User-interactive LCD display for local access		√	√	√	√
Network port sharing			4	4 (CAN)	4 (CAN)
Enhanced security with APC NMC3 integration and Ecostruxure IT ready				√	√
Metering capability					
Metering Accuracy		±3%	±3%	±1%	±1%
Active current measurements (amps)		√	√	√	√
Active power measurements (including volts, amps, real power (kW) and energy (kWh))		√	√	√	√
User-customizable alarms and warnings		√	√	√	√
Embedded log memory to record/review/report		√	√	√	√
Individual outlet power metering				√	√
Use access control with two levels		√	√	√	√
Outlet control					
Individual outlet remote power on/off control			√		√
Power-on sequencing and time delays with full user customization			√		√
Outlet level grouping (multiple outlets in same or multiple units follow single command)			√		√
Use access control with two levels		√	√	√	√
Environmental					
Maximum operating temperature	45°C	45°C	45°C	50°C	50°C
Maintenance					
Warranty	1 year	1 year	1 year	2 year	2 year



Easy Basic Rack PDU

APC Easy Basic Rack PDU provides rack power distribution via a single input with multiple output receptacles and distributes power from low amperage single-phase circuits to higher-power 3-phase solutions.



		EPDU1010B-SCH	EPDU1016B	EPDU1116B	EPDU1116B-SCH	EPDU1132B	EPDU1132B-SCH	EPDU1216B	EPDU1232B	
Electrical	Nominal Voltage	230VAC, 1 phase						400VAC, 3 phase		
	Input Circuit	10A	16A			32A			16A, 3phase	32A, 3phase
	Input frequency	50/60 Hz								
	Input Connector	IEC-320 C14 200-240V Inlet	IEC-320 C20 200-240V Inlet	IEC 309 16A 2P+E	SCHUKO TYPE 16A	IEC 309 32A 2P+E		IEC 309 16A 3P+N+E	IEC 309 32A 3P+N+E	
	Input Cord Length	2.5 m		3 m				2 m		
	Output Voltage	200-240VAC, 1PH								
	Output Receptacles	(1) C13 (6) SCHUKO	(8) C13	(20) C13 (4) C19	(14) SCHUKO , 45° orientation	(20) C13 (4) C19	(21) SCHUKO , 45° orientation	(36) C13 (6) C19	(30) C13 (12) C19	
	Circuit Breakers	NA				2 X 16A 1-pole hydraulic-magnetic circuit breakers		NA	6X 16A 1-pole hydraulic-magnetic circuit breakers	
Physical	Mount Style	Horizontal (19" rackmountable)		Vertical						
	Width	482mm	488mm	62mm						
	Height	44.4mm		902mm		1175mm	1506mm		1794mm	
	Depth	44.4mm								
	Housing material	Aluminum extrusion								
	Tool-less mounting	NA		Yes						
	Color	Black								
Environmental	Operating Temp	-5° to +45°C								
	Operating Humidity	5-95%RH, non-condensing								
	Elevation Operating/Storage	0—3 000 m / 0—15 000 m								
Regulatory	EMC	CE ,followed by standard EN55035, EN55032, EN55024								
	Safety	CE TÜV, followed by standard EN/IEC62368-1								
	Environment	RoHS, REACH								
Package	Rack Mounting Brackets	M6x16mm screw (4pcs), M6 cage nut (4pcs)		M5x10mm,self-tapplng screw (4pcs), L type Bracket 2pcs, included screw						
	Safety Sheet	included								
	Installations Instructions	included								
	Package Dimension	560*150*80mm		1320*160*110			1660*160*110			1950*160*110
	Weight/shipping weight	0.6KG/1.1KG	0.58KG/1.18KG	2.2KG/2.98KG	1.94KG/2.84KG	3.58KG/4.36KG	4.3KG/5.5KG	3.08KG/4.28KG	5.14KG/6.2KG	
Warranty	1year									

Easy Metered Rack PDU

APC Easy Metered Rack PDU provides real-time remote monitoring of connected loads. User-defined alarms warn of potential circuit overloads before critical IT failures occur.



		EPDU1016M	EPDU1116M	EPDU1132M	EPDU1216M	EPDU1232M
Electrical	Nominal Voltage	230VAC, 1 phase			400VAC, 3 phase	
	Input Circuit	16A		32A	16A, 3phase	32A, 3phase
	Input frequency	50/60 Hz				
	Input Connector	IEC-320 C20 200-240V Inlet	IEC 309 16A 2P+E	IEC 309 32A 2P+E	IEC 309 16A 3P+N+E	IEC 309 32A 3P+N+E
	Input Cord Length	2.5 m	3 m		2 m	
	Output Voltage	200-240VAC, 1PH				
	Output Receptacles	(8)C13	(18) C13 (3) C19	(20) C13 (4) C19	(21) C13 (3) C19	(18) C13 (6) C19
	Circuit Breakers	NA		2 X 16A 1-pole hydraulic-magnetic circuit breakers	NA	6X 16A 1-pole hydraulic-magnetic circuit breakers
Physical	Mount Style	Horizontal (19" rackmountable)	Vertical			
	Width	482mm	62mm			
	Height	44.4mm	902mm	1175mm		1506mm
	Depth	44.4mm				
	Housing material	Aluminum extrusion				
	Tool-less mounting	NA	Yes			
	Color	Black				
User Interface	Local User Interface	LCD Display, language:English				
	Local User Control	1 Button for scroll/select/Reset			2 Buttons for scroll/select/Reset	
	Communication I/O	1 Network port , 1 Temperature/Humidity port				
	Remote Management Capabilities	http/https, SNMP V1,V2,V3				
Environmental	Operating Temp	-5° to +45°C				
	Operating Humidity	5-95%RH, non-condensing				
	Elevation Operating/Storage	0—3 000 m / 0—15 000 m				
Regulatory	EMC	CE ,followed by standard EN55035, EN55032, EN55024				
	Safety	CE TÜV, followed by standard EN/IEC62368-1				
	Environment	RoHS, REACH				
Package	Rack Mounting Brackets	M6x16mm screw (4pcs), M6 cage nut (4pcs)	M5x10mm,self-tapping screw (4pcs), L type Bracket 2pcs, includedd screw			
	Safety Sheet	included				
	Installations Instructions	included				
	Package Dimension	560*150*80mm	1320*160*110			1660*160*110
	Weight/shipping weight	0.68KG/1.32KG	2.5KG/3KG	3.72KG/4.48KG	2.74KG/3.26KG	4.64KG/5.48KG
Accessory	EPDU-TH (need to be ordered separately)					
Warranty	1 year					

Easy Switched Rack PDU

APC Easy Switched Rack PDU provides advanced load monitoring combined with remote on/off switching control of individual outlets for power cycling.



		EPDU1016S	EPDU1116S	EPDU1132S	EPDU1216S	EPDU1232S	EPDU1232SX3620
Electrical	Nominal Voltage	230VAC, 1 phase			400VAC, 3 phase		
	Input Circuit	16A		32A	16A	32A	
	Input frequency	50/60 Hz					
	Input Connector	IEC-320 C20 200-240V Inlet	IEC 309 16A 2P+E	IEC 309 32A 2P+E	IEC 309 16A 3P+N+E	IEC 309 32A 3P+N+E	
	Input Cord Length	2.5m	3m		2m		
	Output Voltage	200-240VAC, 1PH					
	Output Receptacles	(8)C13	(20) C13 (4) C19		(21) C13 (6) C19	(18) C13 (6) C19	(30) C13 (6) C19
	Circuit Breakers	NA		2 X 16A 1-pole hydraulic-magnetic circuit breakers	NA	6 X 16A 1-pole hydraulic-magnetic circuit breakers	
Physical	Mount Style	Horizontal (19" rackmountable)	Vertical				
	Width	482mm	55mm				
	Height	44.4mm	1738mm		1794mm		
	Depth	200mm	62mm				
	Housing material	Sheetmetal					
	Tool-less mounting	NA	Yes				
	Color	Black					
User Interface	Local User Interface	LCD Display, language:English					
	Local User Control	2 Buttons for scroll/select/Reset					
	Communication I/O	1 Network port , 1 Temperature/Humidity port, 2RS485 port sharing connection					
	Remote Management Capabilities	http/https, SNMP V1,V2,V3					
Environmental	Operating Temp	-5° to +45°C					
	Operating Humidity	5-95%RH, non-condensing					
	Elevation Operating/Storage	0–3 000 m / 0–15 000 m					
Regulatory	EMC	CE ,followed by standard EN55035, EN55032, EN55024					
	Safety	CE TÜV, followed by standard EN/IEC62368-1					
	Environment	RoHS, REACH					
Package	Rack Mounting Brackets	M6x16mm screw (4pcs), M6 cage nut (4pcs)	M5x10mm, self-tapping screw (4pcs), L type Bracket 2pcs, included screw				
	Safety Sheet	included					
	Installations Instructions	included					
	Package Dimension	560*220*80mm	1950*160*110mm				
	Weight/shipping weight	2.8KG/3.6KG	7.3KG/8.5KG	7.9 KG/9.0KG	6.2KG/7.78KG	8.17KG/9.45KG	8.28KG/9.56KG
Accessory	EPDU-TH (need to be ordered separately)						
Warranty	1 year						

Easy Metered by Outlet Rack PDU with NMC3

Easy Metered by Outlet Rack PDU range is now upgraded with APC NMC3 which makes it more secure and Ecostruxure IT ready. This offers advanced load monitoring combined with individual outlets metering for greater power management.



		NEW EPDU2116MBO	NEW EPDU2132MBO	NEW EPDU2216MBO	NEW EPDU2232MBO
Electrical	Nominal Voltage	230VAC 1 phase		400VAC 3 phase	
	Input Circuit	16A	32 A	16 A	32 A
	Input frequency	50/60 Hz			
	Input Connector	IEC309 16 A 2P+E	IEC309 32 A 2P+E	IEC309 16 A 3P+N+PE	IEC309 32A 3P+N+PE
	Input Cord Length	3m			
	Output Voltage	200-240VAC			
	Output Receptacles	(20) C13 & (4) C19		(18) C13 & (6) C19	
	Circuit Breakers	NA	2 x 16 A 1 Pole Hydraulic-Magnetic Circuit Breakers	NA	6 x 16 A 1 Pole Hydraulic-Magnetic Circuit Breakers
Physical	Mount Style	Vertical			
	Width	55 mm (2.16 in)			
	Height	1800 mm (70.86 in)			
	Depth	56 mm (2.20 in)			
	Housing material	Sheet metal			
	Tool-less mounting	Yes			
	Color	Black			
User Interface	Local User Interface	LCD Display; language: English			
	Local User Control	3 Buttons to scroll/select/Reset			
	Communication I/O	1 x 10/100M T-Base, upto 3 T&H sensor port, 2 x RS485 ports, 1 x RJ45 port, 1 USB port			
	Remote Management Capabilities	http/https; SNMP V1, V2, V3			
Environmental	Operating Temp	-5 - 50°C			
	Operating Humidity	5-95%RH, non-condensing			
	Elevation Operating/Storage	0–3000 m / 0–15000 m			
Regulatory	EMC	EN55035, EN55032, EN61000-3-3, EN61000-3-2, BSEN55035, BS EN55032, BS EN61000-3-3, BS EN61000-3-2			
	Safety	CE, TÜV (EN62368-1), RCM, UKCA, EAC			
	Environment	RoHS, REACH			
Package	Rack Mounting Brackets	M5 x 10mm, self-tapping screw (4pcs), L type Bracket 2pcs (incl. screw)			
	Safety Sheet	Print version included			
	Installations Instructions	Print version included			
	Package Dimension	2030 x 195 x 130 mm			
	Weight/shipping weight	6.37 kg/7.54 kg	7.12 kg/8.29 kg	6.82 kg/7.99 kg	8.38 kg/9.55 kg
Accessory		EPDU-TH3 (need to be ordered separately)			
Warranty		2 year			

Easy Metered by Outlet with Switching Rack PDU (APC NMC3 integrated)

Easy Metered by Outlet with Switching Rack PDU range is now upgraded with APC NMC3 which makes it more secure and Ecostruxure IT ready. This offers advanced load monitoring combined with remote on/off switching control & power metering on individual outlets.




		NEW EPDU2116SMBO	NEW EPDU2132SMBO	NEW EPDU2216SMBO	NEW EPDU2232SMBO
Electrical	Nominal Voltage	230VAC 1 Phase		400VA 3 phase	
	Input Circuit	16A	32 A	16 A	32 A
	Input frequency	50/60 Hz			
	Input Connector	IEC309 16 A 2P+E	IEC309 32 A 2P+E	IEC309 16 A 3P+N+PE	IEC309 32A 3P+N+PE
	Input Cord Length	3m			
	Output Voltage	200-240VAC			
	Output Receptacles	(20) C13 & (4) C19		(18) C13 & (6) C19	
	Circuit Breakers	NA	2 x 16 A 1 Pole Hydraulic-Magnetic Circuit Breakers	NA	6 x 16 A 1 Pole Hydraulic-Magnetic Circuit Breakers
Physical	Mount Style	Vertical			
	Width	55 mm (2.16 in)			
	Height	1800 mm (70.86 in)			
	Depth	56 mm (2.20 in)			
	Housing material	Sheet metal			
	Tool-less mounting	Yes			
	Color	Black			
User Interface	Local User Interface	LCD Display; language: English			
	Local User Control	3 Buttons to scroll/select/Reset			
	Communication I/O	1 x 10/100M T-Base, upto 3 T&H sensor port, 2 x RS485 ports, 1 x RJ45 port, 1 USB port			
	Remote Management Capabilities	http/https; SNMP V1, V2, V3			
Environmental	Operating Temp	-5 - 50°C			
	Operating Humidity	5-95%RH, non-condensing			
	Elevation Operating/Storage	0–3000 m / 0–15000 m			
Regulatory	EMC	EN55035, EN55032, EN61000-3-3, EN61000-3-2, BSEN55035, BS EN55032, BS EN61000-3-3, BS EN61000-3-2			
	Safety	CE, TÜV (EN62368-1), RCM, UKCA, EAC			
	Environment	RoHS, REACH			
Package	Rack Mounting Brackets	M5 x 10mm, self-tapping screw (4pcs), L type Bracket 2pcs (incl. screw)			
	Safety Sheet	Print version included			
	Installations Instructions	Print version included			
	Package Dimension	2030 x 195 x 130 mm			
	Weight/shipping weight	6.67 kg/7.84 kg	7.42 kg/8.59 kg	7.12kg/8.29kg	8.68 kg/9.85 kg
Accessory		EPDU-TH3 (need to be ordered separately)			
Warranty		2 year			

What's NEW

Ultra Light Weight

Reduce 50% weight, thanks to Aluminum housing



Up to
50%
weight
reduction


User-Friendly Web Interface



New-designed Display Module

- Smart, easy-to-use, multifunctional

Easy Metered Rack PDU display:

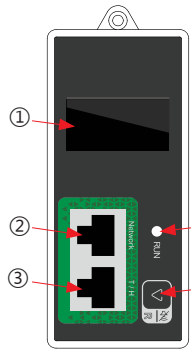

items	function
① LCD Display	display information about the Rack PDU.
② Network Port	Connects the Rack PDU to the network.
③ T/H Sensor port	Port for connecting a Temperature/Humidity Sensor.
④ Status LED	Indicates the working status.
⑤ Function Button	Press to page down and clear alarm. Press and hold for 10 seconds to reset settings to default.

Available Accessories

EPDU-TH / EPDU-TH3

Easy Rack PDU Temperature/Humidity Sensor


Easy Rack PDU environmental sensor with 2-meter cable and RJ45 connector that monitors temperature and humidity in your Data Center or Network Closet.

EPDU-BRKT

Easy Rack PDU Mounting Bracket one pair


Easy Rack PDU Bracket is used for mounting 2 Easy Basic Rack PDUs or Easy Metered Rack PDUs on the side of a NetShelter rack.

Easy Switched Rack PDU display:

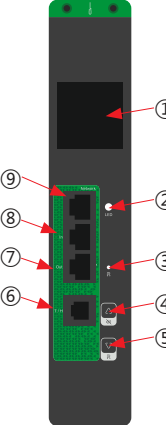

Item	Function	Description
①	LCD Display	View functional data
②	Run Indicator LED	Indicates the status when the power is on
③	Reset Button	Press and hold for 4 seconds to reset to the default settings
④	Up Function Button	Scroll for function status, Alarm shutoff
⑤	Down Function Button	Scroll for function status, Alarm shutoff/reboot (Press and hold for 10 seconds to reboot)
⑥	Temp/Humidity Port	Temp/Humidity Sensor connection port
⑦	Out	RS485 port sharing connection
⑧	In	RS485 port sharing connection
⑨	Network Port	Connect the Rack PDU to your network

NEW Easy Metered by outlet Rack PDU display:

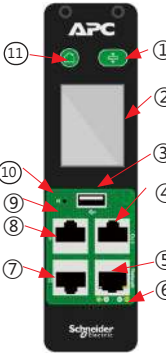

Item	Function	Description
①	Scroll button	Use the scroll button to move through displayed information
②	LCD Display	Show information about the Rack PDU
③	USB Port	Connect a flash drive for firmware upgrades or to download data logs
④	OK Button	With a menu option highlighted, press the OK button to display Rack PDU information
⑤	Out Port	RS485 port sharing connection
⑥	10/100 Base-T Connector	Connect the Rack PDU to the network
⑦	Speakers	Speakers for audio
⑧	RJ45 Serial Port	Port for connecting the Rack PDU to a terminal emulator program for local access to the command line interface
⑨	In Port	RS485 port sharing connection
⑩	Temp/Humidity Port	Temp/Humidity sensor connection port
⑪	Reset Button	Reset the Rack PDU without affecting the status of individual outlets
⑫	Main Menu Button	Press to view the Rack PDU electrical input

Custom Easy Rack PDUs

Pre-configured or custom Easy Rack PDU designs to suit unique project and end-user requirements.

Make Power Distribution and Custom Easy

The APC Easy Rack PDU is an easy-to-install, easy-to-use, easy-to-customize rack mount PDU that helps manage power distribution to the equipment efficiently in the rack.

Ability to customize Rack PDUs and pre-configure them to meet your needs. Some options are configured in as little as 2 weeks with a minimum order quantity of 50!

Length Pre-configuration of Input Cord

Lengthen or shorten the length of a power cord. It is flexible for the customers to choose the right power cord length according to the actual situation of the data center site.

Lockable outlets

Custom Easy Rack PDU provides the ability to choose the lockable C13/C19 outlets. It can prevent the power line from loosening accidentally, which leads to power failure of the equipment.

Color Coding Rack PDUs


Including housing color change or the outlets surrounding color change. Color coding is proven to provide many benefits, most importantly reducing human error, the major culprit of downtime.

Specific labels/silkscreen

Custom Easy PDU provides the ability to specify the labels/silkscreen according to customer needs.

Outlet layout and amount

New flexible Rack PDU architecture provides the ability to adjust the layout and the amount of the outlets according to the installation position and amount of the equipment planned. An additional compliance expense shall be requested if the total number of outlets exceeds the standard model.

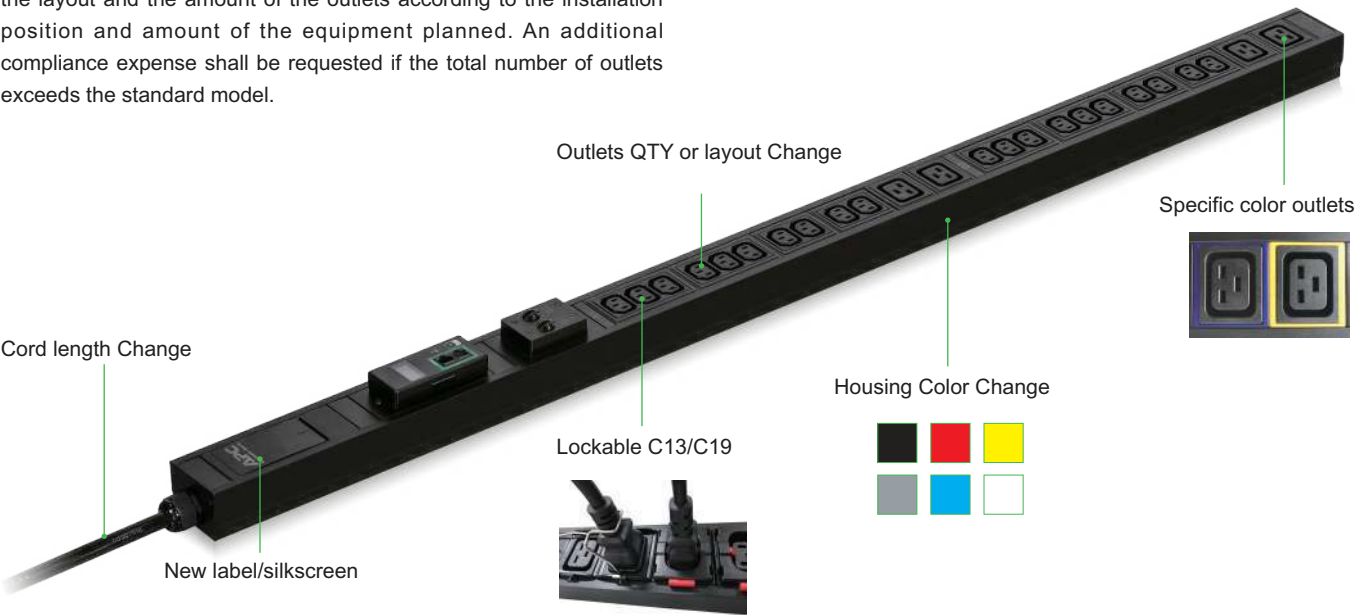


Addressing unique needs with the service you expect from Schneider Electric

- Dedicated team to assist from design to delivery
- Competitive pricing model
- Optimized lead times for special orders
- Fast turn around times for product modifications
- Global supply chain with Schneider Electric

For requests and more details e-mail: easycustomracks@se.com

Life Is On

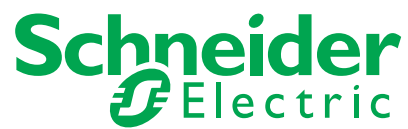

Find out more:

The Rack PDU Selector tool is located at:

www.apc.com/tools/selector/pdu

Schneider Electric

One Boston Place
Floor 27
Boston, MA 02108
United States
www.apc.com

February 2024

©2024 Schneider Electric. All Rights Reserved.
Schneider Electric | Life Is On and APC are trademarks and the property of Schneider Electric SE, its subsidiaries, and affiliated companies.
• 998-21912450_GMA-US