



Datenblatt - Fiche technique - Data sheet

11.04.5576




ROLINE Monitorkabel HDMI High Speed, ST-ST, 10m

ROLINE Câble de raccordement pour écran HDMI High Speed M-M, 10,0m

ROLINE HDMI High Speed Cable, M/M, 10 m

L ± T

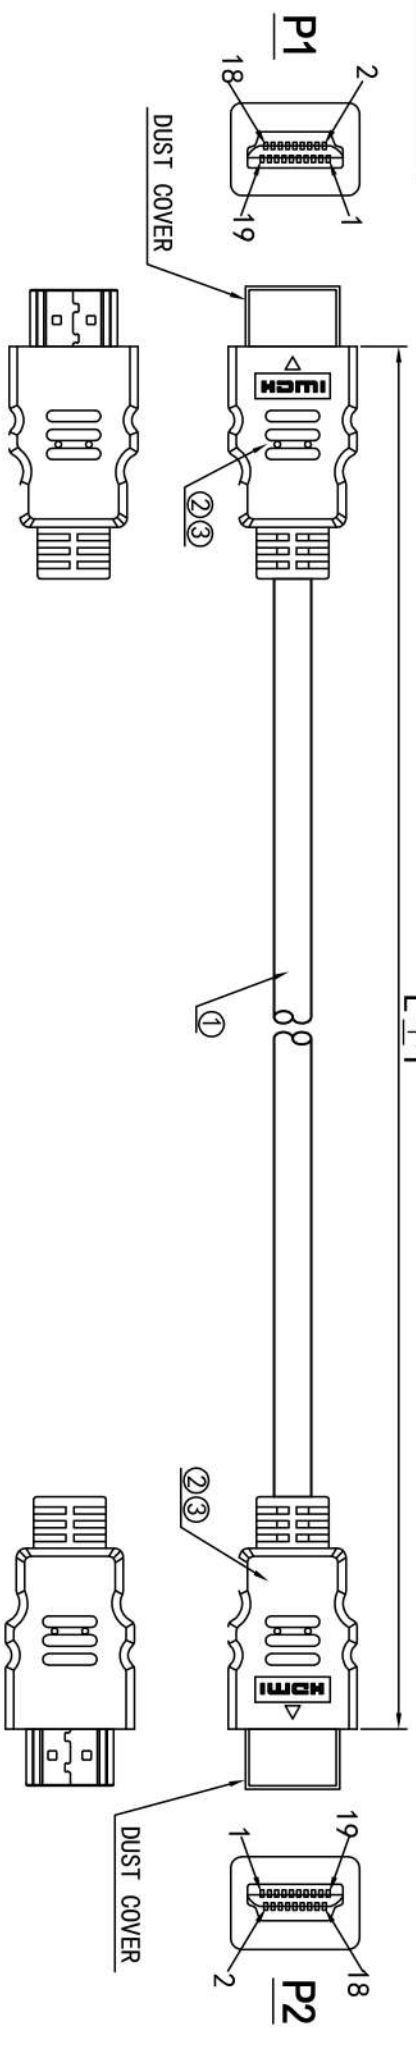

NOTES:


- 1. CABLE: UL20276 (28AWG*1P+EAM) *4+28AWG*1P+28AWG*5C+AEB OD=7.3MM JACKET: PVC BLACK;
(HIGH SPEED HDMI CABLE)
- 2. CONN: HDMI A/M INSULATION: BLACK, SHELL NICKEL-PLATED;
- 3. OUTER MOLD: PVC 45P BLACK;

ELECTRICAL TEST:

- 1. 100% TEST OPEN SHORT MIS-WIRE;
- 2. INSULATION RESISTANCE: 2M OHM MIN;

ITEM NO	L(MM)	T(MM)	HEAD SIZE	LABEL	PACK
11.04.5571	1000	±30	205*166MM	LABEL1	20PCS/CTN
11.04.5572	2000	±30	205*166MM	LABEL2	20PCS/CTN
11.04.5573	3000	±30	205*166MM	LABEL3	20PCS/CTN
11.04.5575	5000	±50	205*166MM	LABEL4	10PCS/CTN
11.04.5576	10000	±100	DO NOT	LABEL5	5PCS/CTN

WIRE ADDRESS

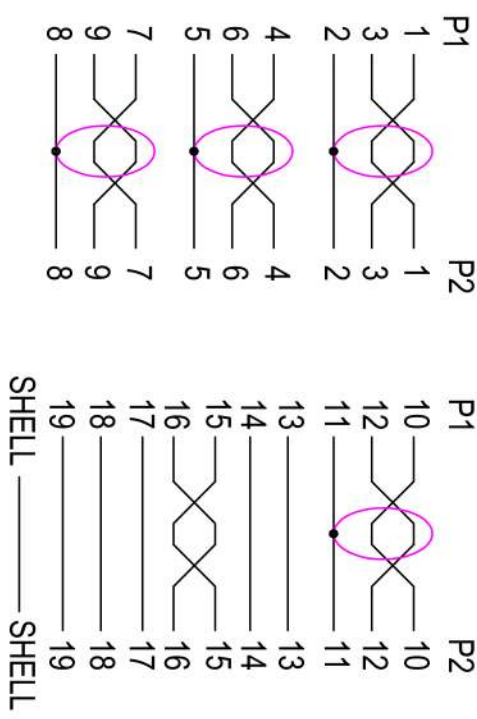

Company	Rotronic	Goods Code			Draw	FC038 ZYF	Date	2012-02-25	Rotronic Co.,Ltd.	D	
ITEM NO	11.04.557X		Drawing Evidence:		Check		Date			C	
Goods NO							Date			B	
or ignatNO.		Unit (MM)			Approval		Date			VER. A	REVISE
											Date

