



HP 711 29-ml Magenta DesignJet Ink Cartridge

Brand : HP

Product code: CZ131A

Product name : 711 29-ml Magenta DesignJet Ink Cartridge



- AEC students, AEC professionals and freelancers, construction offices, universities, and small AEC workteams.
711 29-ml Magenta DesignJet Ink Cartridge


HP 711 29-ml Magenta DesignJet Ink Cartridge:

AEC students, AEC professionals and freelancers, construction offices, universities, and small AEC workteams.
HP 711 29-ml Magenta Ink Cartridge provides consistent, accurate results. See rich colour and sharp line accuracy in fast-drying, smudge-resistant prints. Original HP inks are designed and tested with your printer to provide consistent results.
HP 711 29-ml Magenta DesignJet Ink Cartridge. Compatibility: HP DesignJet T100, T120, T125, T130, T520, T525, T530 Printer series, Print technology: Thermal inkjet, Printing colours: Magenta. Width: 114 mm, Depth: 126 mm, Height: 25 mm. Package width: 114 mm, Package depth: 126 mm, Package height: 25 mm. Master (outer) cases per pallet: 120 pc(s), Products per pallet: 6000 pc(s), Layers per pallet: 10 pc(s). Pallet dimensions (W x D x H): 1219 x 1016 x 1702 mm

WORKS WITH
THESE HP PRINTERS:



Performance		Logistics data	
Compatibility *	HP DesignJet T100, T120, T125, T130, T520, T525, T530 Printer series	Master (outer) cases per pallet	120 pc(s)
Print technology	Thermal inkjet	Pallet dimensions (W x D x H)	1219 x 1016 x 1702 mm
Printing colours	Magenta	Products per pallet	6000 pc(s)
Country of origin	United States, Singapore, Malaysia	Layers per pallet	10 pc(s)
Weight & dimensions		Pallet gross weight	517.9 kg
Width	114 mm	Products per master (outer) case	50 pc(s)
Depth	126 mm	Master (outer) case gross weight	4.15 kg
Height	25 mm	Quantity per pack	1 pc(s)
Weight	60 g	Technical details	
Packaging data		Box contents	Ink cartridge
Package width	114 mm	Total carbon footprint (kg of CO2e)	0.5
Package depth	126 mm	Master (outer) cases per pallet layer	12 pc(s)
Package height	25 mm	Other features	
Package weight	80 g	UNSPSC-code	441031052
Operational conditions			
Operating temperature (T-T)	5 - 35 °C		
Operating relative humidity (H-H)	10 - 90%		
Storage temperature (T-T)	-40 - 60 °C		

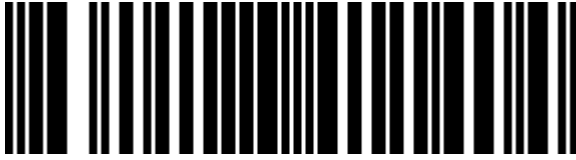

8861128411404




0163120815555



163120815555



4053162287518

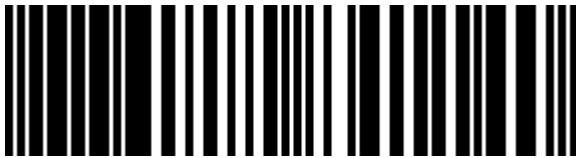

0886112841140



886112841140



3022031996005

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 11-APR-2026. Prints or copies of Information are only valid on the printed Publication date