



HP 91 775-ml Magenta DesignJet Pigment Ink Cartridge

Brand : HP

Product code: C9468A

Product name : 91 775-ml Magenta DesignJet Pigment Ink Cartridge

- Ideal for small and large digital printers, photolabs, quickprinters and copyshops.
 - Ink cartridge
- 91 775-ml Magenta DesignJet Pigment Ink Cartridge

HP 91 775-ml Magenta DesignJet Pigment Ink Cartridge:

Ideal for small and large digital printers, photolabs, quickprinters and copyshops. Consistent, high-quality results from brilliant colour to crisp lines. Exceptional fade resistance^[1]. Time-saving supplies reordering^[2]. Count on trouble-free printing with Original HP cartridges and HP Photo Inks to get the job done right.

HP 91 775-ml Magenta DesignJet Pigment Ink Cartridge. Compatibility: HP DesignJet Z6100 Printer series, Print technology: Thermal inkjet, Printing colours: Magenta. Width: 324 mm, Depth: 120 mm, Height: 64 mm. Package width: 324 mm, Package depth: 120 mm, Package height: 64 mm. Master (outer) cases per pallet: 60 pc(s), Products per pallet: 600 pc(s), Layers per pallet: 5 pc(s). Pallet dimensions (W x D x H): 1220 x 1016 x 1680 mm, Pallet size (EU): 1220 x 1016 x 1680 mm



Performance		Logistics data	
Compatibility *	HP DesignJet Z6100 Printer series	Master (outer) cases per pallet	60 pc(s)
Print technology	Thermal inkjet	Pallet dimensions (W x D x H)	1220 x 1016 x 1680 mm
Printing colours	Magenta	Products per pallet	600 pc(s)
Country of origin	Singapore	Layers per pallet	5 pc(s)
Weight & dimensions		Pallet size (EU)	1220 x 1016 x 1680 mm
Width	324 mm	Pallet gross weight	707 kg
Depth	120 mm	Products per master (outer) case	10 pc(s)
Height	64 mm	Master (outer) case gross weight	11.5 kg
Weight	1 kg	Quantity per pack	1 pc(s)
Packaging data		Technical details	
Package width	324 mm	Box contents	Ink cartridge
Package depth	120 mm	Total carbon footprint (kg of CO2e)	3
Package height	64 mm	Master (outer) cases per pallet layer	12 pc(s)
Package weight	1.09 kg	Other features	
Operational conditions		UNSPSC-code	441031052
Operating temperature (T-T)	15 - 35 °C		
Operating relative humidity (H-H)	20 - 80%		
Storage temperature (T-T)	5 - 40 °C		



0882780987227




882780987227



0883585267200



883585267200

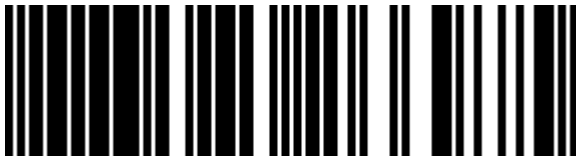

0883585266975



883585266975

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.