


Delock Active USB 3.2 Gen 1 Cable USB Type-A to USB Type-B 5 m

Description

This active USB cable by Delock with integrated signal amplifier is used to connect devices with USB Type-B female port to a PC or laptop with USB Type-A port. The cable has an additional DC power socket at the signal amplifier to which an optional power supply can be connected.

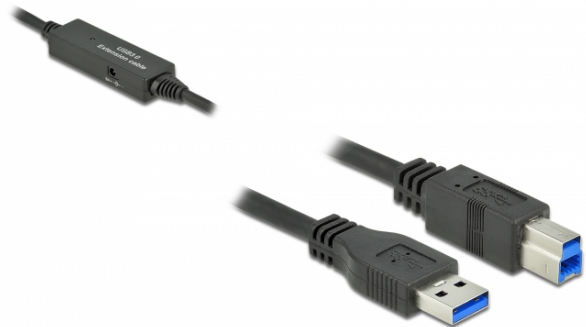

Specification

- Connectors:
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-A male >
 - 1 x SuperSpeed USB (USB 3.2 Gen 1) Type-B male
 - 1 x DC jack
- Chipset: Genesys Logic GL3523
- DC jack for optional power supply
- Status LED
- Cable gauge:
 - 28 AWG data line
 - 24 AWG power line
- Cable diameter: ca. 5.5 mm
- Data transfer rate up to SuperSpeed USB 5 Gbps
- Colour: black
- Dimensions of signal amplifier (LxWxH): ca. 6.7 x 2.2 x 1.2 cm
- Length incl. connectors: ca. 5 m

Specification of power connector

- Input: 5 V / 1 A
- Ground outside, plus inside
- Dimensions:
 - inside: ø ca. 1.1 mm
 - outside: ø ca. 3.5 mm
 - length: ca. 7.0 mm

System requirements

- PC or laptop with a free USB Type-A port

Package content


- USB 3.2 Gen 1 cable

Item no. 85379

EAN: 4043619853793

Country of origin: China

Package: White Box





Images





General	
Specification:	SuperSpeed USB (USB 3.1 Gen 1)
Interface	
Connector 1:	1 x SuperSpeed USB (USB 3.1 Gen 1) Type-A male
Connector 2:	1 x SuperSpeed USB (USB 3.2 Gen 1) Type-B male
Technical characteristics	
Chipset:	Genesys Logic GL3523
Data transfer rate:	5 Gbps
Physical characteristics	
Cable diameter:	5.5 mm
Conductor gauge:	28 AWG data line
	24 AWG power line
Length:	5 m
Colour:	black